


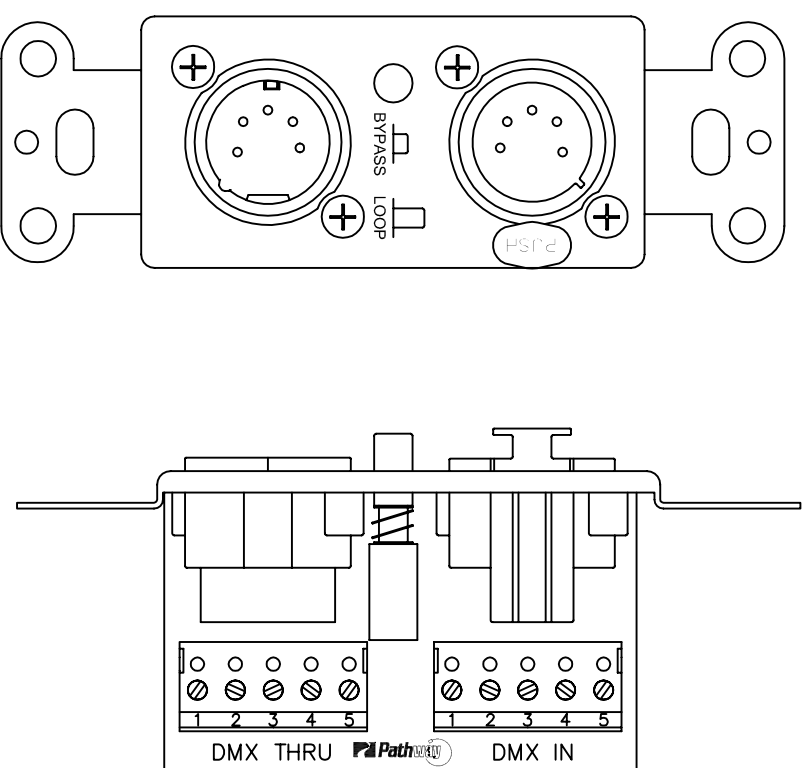


Notes:
 Available in the following colors:
 SS-Stainless Steel

Loop mode allows a DMX send from the female XLR to be daisy-chained through other equipment before being looped back to the male XLR connector.

By-pass mode shunts DMX directly from the terminal block input to the terminal block thru connector.

Although the XLR connectors are not disabled in by-pass mode, this assembly provides no DMX merging or splitting capabilities and the XLR plugs should not be connected when the by-pass is used.



BELDEN #9829 CABLE				
T.B. NO.	SIGNAL	COLOR	PAIR	DRAIN
1	COMMON	BROWN	SHLD	
2	D1-	WHT/BLU		1
3	D1+	BLU/WHT		
4	NOT USED	WHT/ORG		
5	NOT USED	ORG/WHT		2

BELDEN #9829 CABLE				
T.B. NO.	SIGNAL	COLOR	PAIR	DRAIN
1	COMMON	BROWN	SHLD	
2	D1-	WHT/BLU		1
3	D1+	BLU/WHT		
4	NOT USED	WHT/ORG		
5	NOT USED	ORG/WHT		2

CATEGORY 5 CABLE				
T.B. NO.	SIGNAL	COLOR	PAIR	DRAIN
1	COMMON	BROWN (BOTH)		
2	D1-	ORG		
3	D1+	WHT/ORG		
4	NOT USED	GRN		
5	NOT USED	WHT/GRN		

CATEGORY 5 CABLE				
T.B. NO.	SIGNAL	COLOR	PAIR	DRAIN
1	COMMON	BROWN (BOTH)		
2	D1-	ORG		
3	D1+	WHT/ORG		
4	NOT USED	GRN		
5	NOT USED	WHT/GRN		

DMX Pass-Thru Insert

FILENAME: 500x_51xx (REV D).DWG

PART NUMBER: 5180



Pathway Connectivity
 103 Inglewood Plaza, 1439 17th Avenue SE
 Calgary, Alberta, Canada T2G 1J9
 Phone: +1(403)243-8110 Fax: +1(403)287-1281
<http://www.pathwayconnect.com>

DRAWN BY: BRIAN F. EVANS
 DATE: 12/7/2015
 CHECKED: ROBERT ARMSTRONG
 SCALE: NTS
 UNITS: INCHES

REV